


RoHS


Features:

- * Comply with OIML Standard
- * Aluminum Alloy Construction or Stainless Steel.
- * Used in force testing applications with limited space.

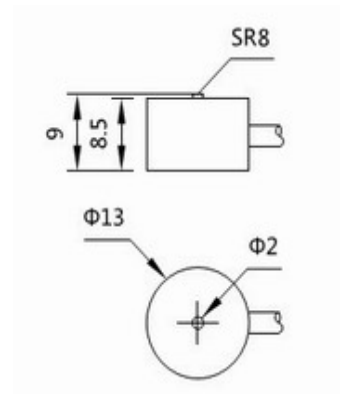

TC302 Specification:

Capacity	5, 10, 20, 50(Kg)	Operating Temp. Range	-20 - + 60°C
Accuracy	C1	Recommended Excitation	≤6VDC
Output Sensitivity	2.0±0.5%mv/v	Max. Excitation Voltage	6VDC
Zero Balance	±0.1mv/v	Safe Overload	120%F.S.
Combined Error	±1%F.S.	Ultimate Overload	150%F.S.
Creep in 30 Minutes	±1%F.S.	Insulation Resistance	≥2000MΩ(50VDC)
Linearity Error	±1%F.S.	Cable Length	φ2.2mm*2000mm
Repeatability Error	±1%F.S.	Protection Class	IP65
Hysteresis Error	±1%F.S.	Wiring Code (4-wire, Braid shielded, PVC Cable):	
Input Resistance	350±10Ω		
Output Resistance	350±10Ω		
Temp. Effect on Sensitivity	±1%F.S./10°C		
Temp. Effect on Zero	±1%F.S./10°C		
Compensated Temp. Range	-10 - +40°C		

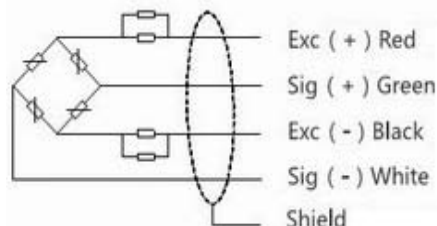

Note:

- * Size, Cable Length, Capacity and Thread Type Could be Customized according to your requirement.
- * All specifications subject to change without notice, please confirm before order.