



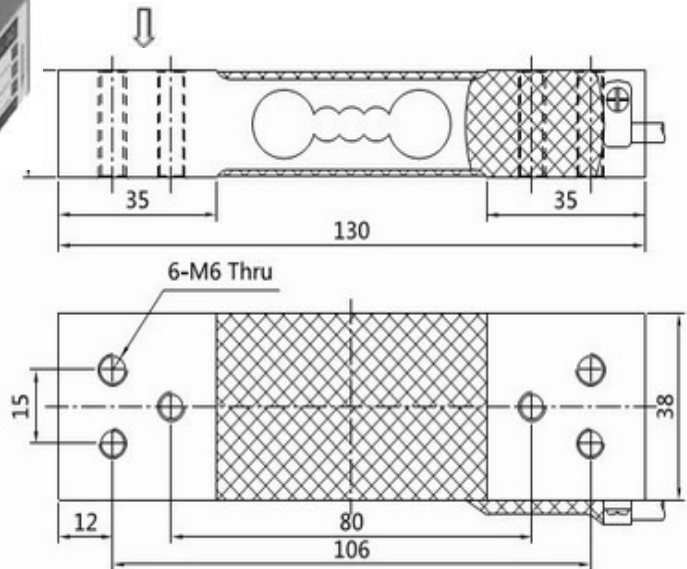

Features:


- * Comply with OIML Standard
- * Aluminum Alloy Construction
- * High Accuracy
- * Used in Price Computing Scales, Counting Scale and Weighing Scales, etc.
- * Max. Platform Size: 250×350mm

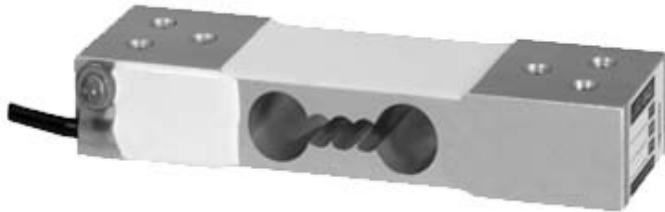

RoHS

TB203 Specification:

Capacity	20, 30, 40, 50, 60, 100(Kg)	Operating Temp. Range	-20 - + 60°C
Accuracy	C4	Recommended Excitation	5 - 12VDC
Output Sensitivity	2.0±10%mv/v	Max. Excitation Voltage	18VDC
Zero Balance	±5%F.S.	Safe Overload	150%F.S.
Combined Error	±0.02%F.S.	Ultimate Overload	200%F.S.
Creep in 30 Minutes	±0.03%F.S.	Insulation Resistance	≥ 5000MΩ(50VDC)
Linearity Error	±0.015%F.S.	Cable Length	φ4mm*400mm
Repeatability Error	±0.01%F.S.	Protection Class	IP65
Hysteresis Error	±0.01%F.S.	Wiring Code (4-wire, Braid shielded, PVC Cable):	
Input Resistance	405±10Ω		
Output Resistance	350±3Ω		
Temp. Effect on Sensitivity	±0.02%F.S./10°C		
Temp. Effect on Zero	±0.02%F.S./10°C		
Compensated Temp. Range	-10 - + 40°C		

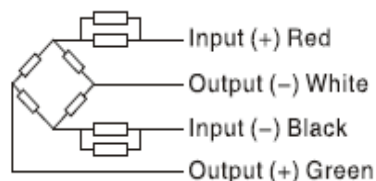

Note:

- * Size, Cable Length, Capacity and Thread Type Could be Customized according to your requirement.
- * All specifications subject to change without notice, please confirm before order.