


RoHS


Features:

- * Comply with OIML Standard
- * Aluminum Alloy Construction
- * 6-wire Cable
- * Used in Platform Scale, and other weighing applications, etc.
- * Max. Platform Size: 240×240mm

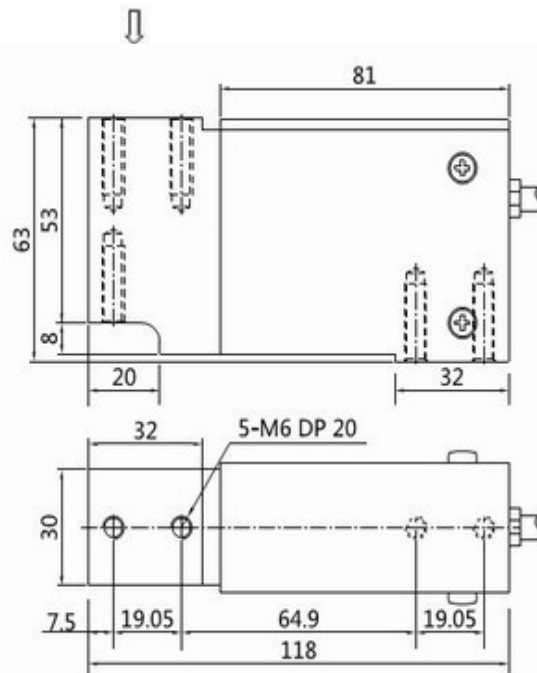

TP358 Specification:

| | | | |
|-----------------------------|----------------------------|--------------------------------------------------|-----------------|
| Capacity | 5, 10, 15, 20, 50, 100(Kg) | Operating Temp. Range | -20 - + 60°C |
| Accuracy | C4 | Recommended Excitation | 5 - 12VDC |
| Output Sensitivity | 2.0±5%mv/v | Max. Excitation Voltage | 18VDC |
| Zero Balance | ±2%F.S. | Safe Overload | 150%F.S. |
| Combined Error | ±0.02%F.S. | Ultimate Overload | 200%F.S. |
| Creep in 30 Minutes | ±0.02%F.S. | Insulation Resistance | ≥ 5000MΩ(50VDC) |
| Linearity Error | ±0.015%F.S. | Cable Length | φ6mm*2500mm |
| Repeatability Error | ±0.01%F.S. | Protection Class | IP66 |
| Hysteresis Error | ±0.01%F.S. | Wiring Code (6-wire, Braid shielded, PVC Cable): | |
| Input Resistance | 403±10Ω | | |
| Output Resistance | 350±4Ω | | |
| Temp. Effect on Sensitivity | ±0.02%F.S./10°C | | |
| Temp. Effect on Zero | ±0.02%F.S./10°C | | |
| Compensated Temp. Range | -10 - + 40°C | | |

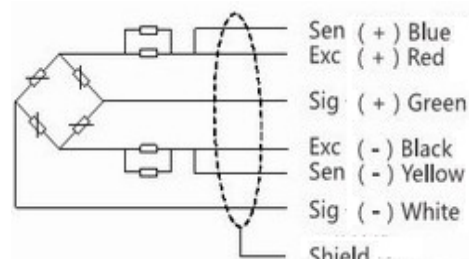

Note:

- * Size, Capacity and Thread Type Could be Customized according to your requirement.
- * All specifications subject to change without notice, please confirm before order.